


**TYPE 1 CROSS RECESS  
PAN HEAD  
TRILOBULAR 48-2 T.F.S.**

88XXXXPPP
APRIL, 2014
REV 00
PAGE 1 of 1

Nominal Screw Length	Tolerance On Screw Length
Up To & Including 3/4"	± .030
Over 3/4"	± .050

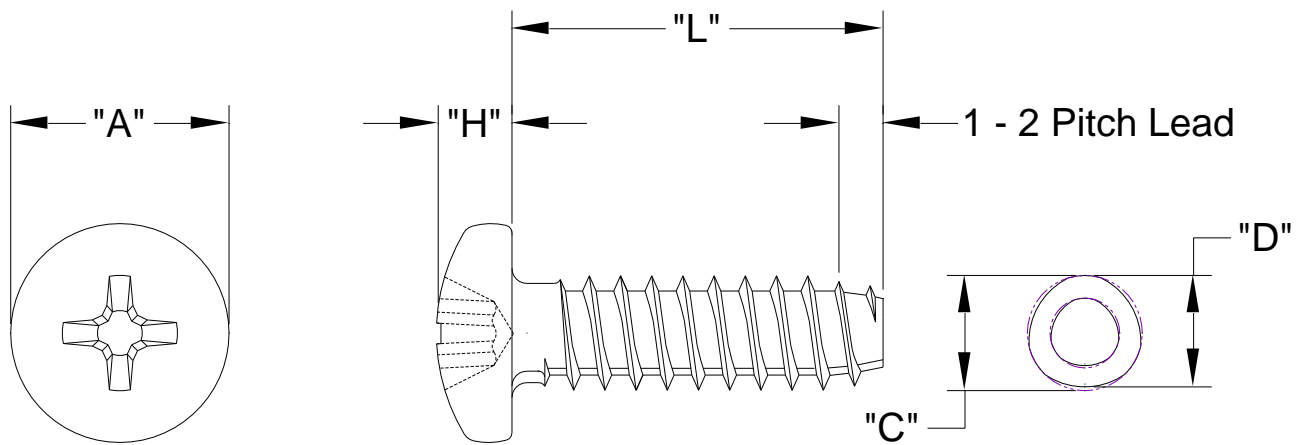

Nominal Screw Size	"C"		"D"		"A"		"H"		Driver Size	Recess Penetration Gaging Depth	
	Circumscribing Circle		Major Diameter		Head Diameter		Head Height			Max.	Min.
	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.			
#2-28	0.092	0.086	0.089	0.083	0.167	0.155	0.062	0.053	1	0.052	0.034
#3-24	0.110	0.104	0.106	0.100	0.193	0.180	0.071	0.062	1	0.061	0.043
#4-20	0.127	0.121	0.123	0.117	0.219	0.205	0.080	0.070	1	0.071	0.053
#6-19	0.147	0.141	0.143	0.137	0.270	0.256	0.097	0.087	2	0.080	0.055
#8-16	0.185	0.179	0.179	0.173	0.322	0.306	0.115	0.105	2	0.097	0.071
#10-14	0.212	0.206	0.208	0.202	0.373	0.357	0.133	0.122	2	0.113	0.089

Head Standard: ASME B18.6.3 Material: 300 Series Stainless Steel (18-8) Finish: Passivate, Wax	<b>COMMON USES:</b> Plastics Less Than 800,000 psi Flexural Modulus
--	---